



ESSEX GRILLED WINDOW KIT

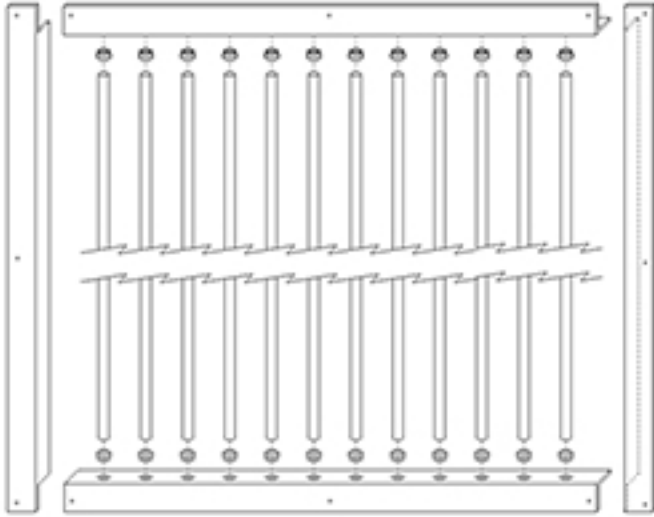

AVAILABLE IN:

- 36"W x 24"H
- 24"W x 36"H
- 32"W x 36"H
- 36"W x 36"H
- 36"W x 48"H
- 48"W x 36"H
- 48"W x 48"H

Channels and tubes can be field cut to fit your window size.

NOTE: If you do field cut the standard sizes, notch the side angle ends and drill the screw holes in a similar manner and location as the standard pieces.

1. Install the vertical side angles with #12 X 1- 1/4" screws supplied ensuring both sides are plumb.
2. Insert the nylon bushings (black grommets) into the upper and lower predrilled grill channel bar holes.
3. Insert the bottom grill channel so the bottom edge lines up with the bottom of the side angle plates. Insert and tighten bottom grill channel screws.
4. Place grill bars into the bottom grill channel. NOTE: If bars require cutting, be sure they are cut to the full And exact opening height.
5. Place top channel over rods and tip back into opening. Position upper grill channel so that the top edge lines up with the top edge of the side angle plates. Insert and tighten bottom grill channel screws.

KIT INCLUDES:



- 2, Window Channel Frames
- 2, Grill Channel Frames
- 3/4" Window Grill Bars
- 3/4" Window Grill Grommets
- Stall Screws

SPECIFICATIONS:

- Finish: Pre-Galv
- Channel Gauge: 11-ga
- Bar Gauge: 14-ga
- Bar Spacing: 3/4"
- Bar Diameter: 3/4"